


PHB-PV21



NOTE:

1. BASE THICKNESS VARIES WITH TRAFFIC, CLIMATE, AND SOIL SUBGRADE
2. CONCRETE BASE MINIMUM 2% SLOPE FROM CENTERLINE TO CURB

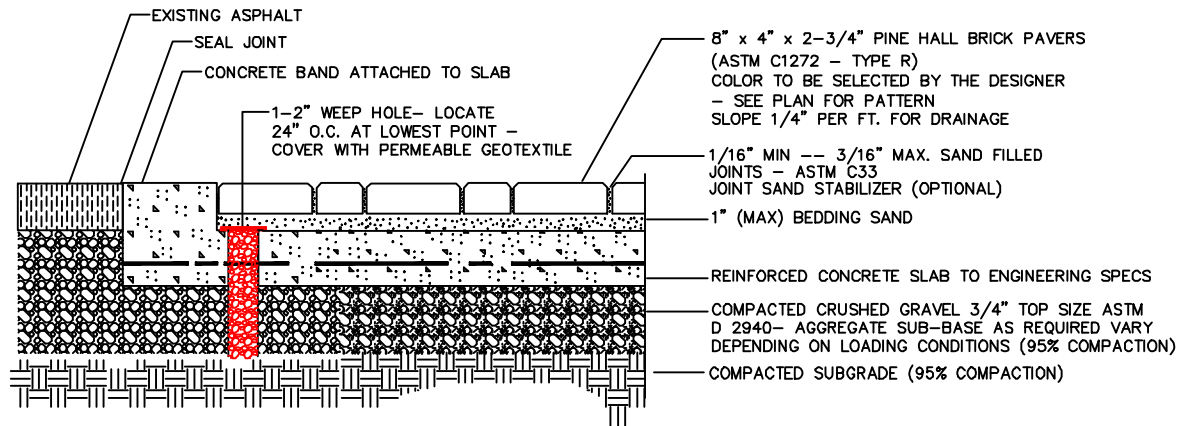

**Pine Hall Brick** HEAVY VEHICULAR APPLICATION  
FLEXIBLE BRICK PAVING OVER A RIGID BASE

SCALE: NOT TO SCALE